


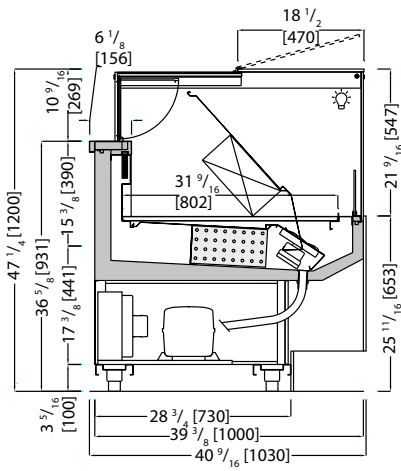


Ventilated Refrigeration showcase for Meats.

Innovative patented glass structure | heated glass sides | sliding glass top on operator side with soft closing system and folding glass opening with magnetic clamps | glass top on customer side with upward opening | front and side LED light fixture | bright aluminum profiles | Tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with electronic valve | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel

 35.6°F / 46.4°F





















Technical












-  Ventilated
-  R452A
-  Hermetic
-  Led no-spot 3000°K
-  Automatic / electrical
-  N. 4 / RH 55% max 75 °F
-  120 V / 1 Ph / 60 Hz
-  35.6°F / 46.4°F

Data Sheet

*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation  *Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion BTU / °F	GAS Type
 SQ10G1M100I (+PANELS)	39 3/8 x 40 9/16 x 47 1/4  46 7/16 x 47 5/8 x 58 11/16	243  231	800 / 4.1	0.5	2388 / 14	R452A
 SQ10G1M150I (+PANELS)	59 1/16 x 40 9/16 x 47 1/4  66 1/8 x 47 5/8 x 58 11/16	342  309	950 / 5.2	0.6	3071 / 14	R452A
 SQ10G1M200I (+PANELS)	78 3/4 x 40 9/16 x 47 1/4  85 13/16 x 47 5/8 x 58 11/16	441  353	1250 / 6.9	0.8	4095 / 14	R452A
 SQ10G1M260I (+PANELS)	102 3/8 x 40 9/16 x 47 1/4  109 7/16 x 47 5/8 x 58 11/16	551  441	1500 / 7.5	1.0	5118 / 14	R452A
 SQ10G1M300I (+PANELS)	118 1/8 x 40 9/16 x 47 1/4  125 3/16 x 47 5/8 x 58 11/16	628  485	1700 / 8.5	1.1	5459 / 14	R452A

Optionals:

- 
CIV65-68
Stationary shelf option
- 
CIV96
LED lighting for shelf
- 
VRG01
Heated front
- 
SCORTF01-03
L-shaped doors
- 
CIV01
S/S plate for scale
- 
CIV02-04
Paper holder
- 
CIT16
Condensation water pan
- 
CIM08
Kit wheels
- 
White
SAN01
White system