

6040 P8 GEL R4 H1200

CiAM





Gelato Showcase

Glass structure with mechanical fastening | heated glass sides | bright aluminum LED light fixture | PETG easy sliding doors system | anti-fog air baffle | Tank insulated with ecological polyurethane and covered in stainless steel | ventilated refrigeration with increased "delivery port" | reverse cycle defrost | electronic control unit and digital temperature reader flush with the worktop | worktop and perimeter shelf in polished steel | pre-arrangement for 5lt pans dim. $14 \frac{1}{16} \times 6 \frac{7}{16} \times 4 \frac{11}{16}$ [360 x 165 x 120] or 4lt pan dim. $10 \frac{3}{16} \times 6 \frac{5}{16} \times 7 \frac{7}{8}$ [258 x 160 x 150] not supplied | supporting frame in galvanized steel with height adjustable stainless steel feet | technical compartment in polished stainless steel



0°F



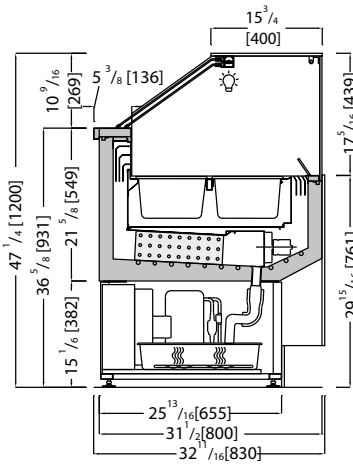

Technical



- Ventilated
- R452A
- Hermetic
- Led no-spot 3000°K
- Automatic / reverse cycle
- N. 4 / RH 55% max 75°F
- 220 V / 3 Ph / 60 Hz
- 0°F

Data Sheet

*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Crate weight only

Model Code	Dimensions L x D x H Inches [mm]	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion BTU / °F	GAS Type
 S08R412GL12I (+PANELS)	45 1/4 x 32 11/16 x 47 1/4	397	1700 / 9.0	0.9	1911/ -31	R452A
	51 15/16 x 39 3/4 x 58 11/16	220				
 S08R412GL18I (+PANELS)	64 15/16 x 32 11/16 x 47 1/4	573	2200 / 11.5	1.2	2593/ -31	R452A
	71 5/8 x 39 3/4 x 58 11/16	298				
 S08R412GL24I (+PANELS)	84 5/8 x 32 11/16 x 47 1/4	661	2700 / 14.0	1.8	3071/ -31	R452A
	91 5/16 x 39 3/4 x 58 11/16	386				

Optionals:

CIV61 s/s pan inches 14 7/16 x 6 7/16 x 4 11/16 [360x165x120]	CIV63 s/s pan inches 14 1/16 x 9 13/16 x 3 7/16 [360x250x80]	CIVF95 s/s display tray	GSG02 Perspex pan	CIV56 s/s dipper well	SCORTF01-03 L-shaped doors	PASPRA Switch from -0.4°F to +39.2°F	CIT44 Easy Clean Filter	CIM08 Kit wheels