





## Ventilated Refrigerated Showcase.

Glass structure with mechanical fastening | heated glass sides | bright aluminum LED light fixture | PETG easy sliding doors system | anti-fog air baffle | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with capillary system (thermostatic valve for external motor) | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel



+35.6°F / +46.4°F



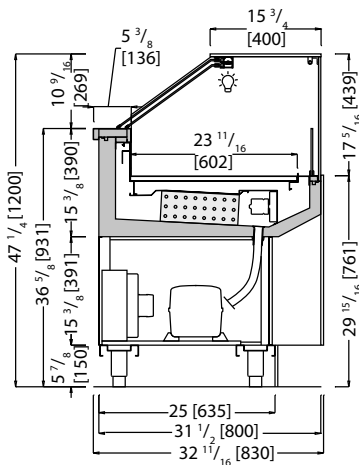

**Technical**



- Ventilated
- Led no-spot 3000°K
- R452A / R290 ECO Friendly
- Hermetic
- Automatic
- N. 4 /RH 55% max 75 °F
- 120 V / 1 Ph / 60 Hz
- +35.6°F / +46.4°F

**Data Sheet**

\*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation \*Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion BTU / °F	GAS Type
SQ8R412RV090I (+PANELS)	35 7/16 x 32 11/16 x 47 1/4 42 1/2 x 39 3/4 x 58 11/16	231 176	550 / 3.3	0.3	1467 / 14	R290
SQ8R412RV100I (+PANELS)	39 3/8 x 32 11/16 x 47 1/4 46 7/16 x 39 3/4 x 58 11/16	231 198	550 / 3.3	0.3	1467 / 14	R290
SQ8R412RV130I (+PANELS)	51 3/16 x 32 11/16 x 47 1/4 58 1/4 x 39 3/4 x 58 11/16	287 243	620 / 3.5	0.35	2150 / 14	R290
SQ8R412RV150I (+PANELS)	59 1/16 x 32 11/16 x 47 1/4 66 1/8 x 39 3/4 x 58 11/16	287 287	620 / 3.5	0.35	2150 / 14	R290
SQ8R412RV170I (+PANELS)	66 15/16 x 32 11/16 x 47 1/4 74 x 39 3/4 x 58 11/16	353 331	710 / 3.8	0.4	2354 / 14	R290
SQ8R412RV200I (+PANELS)	78 3/4 x 32 11/16 x 47 1/4 85 13/16 x 39 3/4 x 58 11/16	397 375	850 / 4.5	0.5	2764 / 14	R290
SQ8R412RV210I (+PANELS)	82 11/16 x 32 11/16 x 47 1/4 89 3/4 x 39 3/4 x 58 11/16	397 386	850 / 4.5	0.5	2764 / 14	R290
SQ8R412RV AP90QI (+PANELS)	44 11/16 * 44 11/16 x 32 11/16 x 47 1/4 51 15/16 x 51 15/16 x 58 11/16	287 353	1050 / 5.9	0.6	3412 / 14	R452A
SQ8TS12RV AP90FI* (+PANELS)	R55 3/8 x 32 11/16 x 47 1/4 62 3/16 x 39 3/4 x 58 11/16	353 331	850 / 4.5	0.5	2900 / 14	R452A

\* Only with TS glass structure

**Optionals:**

