





Ventilated Refrigeration Showcase.

Glass structure with mechanical fastening | heated glass sides | bright aluminum LED light fixture | PETG easy sliding doors system | anti-fog air baffle | Tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with capillary system (thermostatic valve for external motor) | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel



+35.6°F / +46.4°F



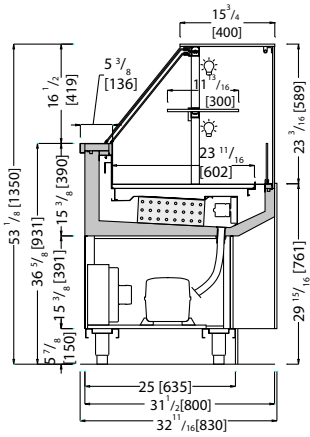

Technical



- Ventilated
- R452A / R290 ECO Friendly
- Hermetic
- Led no-spot 3000°K
- Automatic
- N. 4 / RH 55% max 75°F
- 120 V / 1 Ph / 60 Hz
- +35.6°F / +46.4°F

Data Sheet

*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion BTU / °F	GAS Type
SQ8R413RV090I (+PANELS)	35 7/16 x 32 11/16 x 53 1/8 42 1/2 x 39 3/4 x 64 9/16 196	231	550 / 3.3	0.3	1467 / 14	R290
SQ8R413RV100I (+PANELS)	39 3/8 x 32 11/16 x 53 1/8 46 7/16 x 39 3/4 x 64 9/16 214	231	550 / 3.3	0.3	1467 / 14	R290
SQ8R413RV130I (+PANELS)	51 3/16 x 32 11/16 x 53 1/8 58 1/4 x 39 3/4 x 64 9/16 269	287	620 / 3.5	0.35	2150 / 14	R290
SQ8R413RV150I (+PANELS)	59 1/16 x 32 11/16 x 53 1/8 66 1/8 x 39 3/4 x 64 9/16 287	306	620 / 3.5	0.35	2150 / 14	R290
SQ8R413RV170I (+PANELS)	66 15/16 x 32 11/16 x 53 1/8 74 x 39 3/4 x 64 9/16 342	353	710 / 3.8	0.4	2354 / 14	R290
SQ8R413RV200I (+PANELS)	78 3/4 x 32 11/16 x 53 1/8 85 13/16 x 39 3/4 x 64 9/16 397	397	850 / 4.5	0.5	2764 / 14	R290
SQ8R413RV210I (+PANELS)	82 11/16 x 32 11/16 x 53 1/8 89 3/4 x 39 3/4 x 64 9/16 397	414	850 / 4.5	0.5	2764 / 14	R290
SQ8R413RV AP90I (+PANELS)	44 11/16 *44 11/16 x 32 11/16 x 53 1/8 51 15/16 x 51 15/16 x 64 9/16 313	353	1050 / 5.9	0.6	3412 / 14	R452A
SQ8TS13RV AP90FI* (+PANELS)	R55 3/8 x 32 11/16 x 53 1/8 62 3/16 x 39 3/4 x 64 9/16 287	309	850 / 4.5	0.5	2900 / 14	R452A

* Only with TS glass structure

Optionals:

