

# BRILLIANT two sided

CIAM

## SIDES

Standard  
- double glazed glass

Optional  
- blind side

## DOORS

Standard  
- PREMIUM doors  
- triple glazed glass  
- Mirror screen-printing

Optional:  
- RAL screen-printing

## PANELS


Standard  
- Polish s/s

Optional  
- powder-coated

### Double-sided Positive Temperature Display Case

molded heat-insulated tank made of ecological polyurethane coated with AISI 304 s/s | fan ventilated refrigeration system on all display levels positioned in the lower tank | automatic defrost | version with remote or built-in hermetic condensing unit | digital control panel | double-sided 'premium' doors with mirror serigraphy | bottom tray in polished steel | perimeter walls in double glazed glass | glass shelves adjustable on rack rods | vertical lighting integrated on the internal corners with no spot 3000°K strip-led | base of counter and tubular steel base with height-adjustable feet



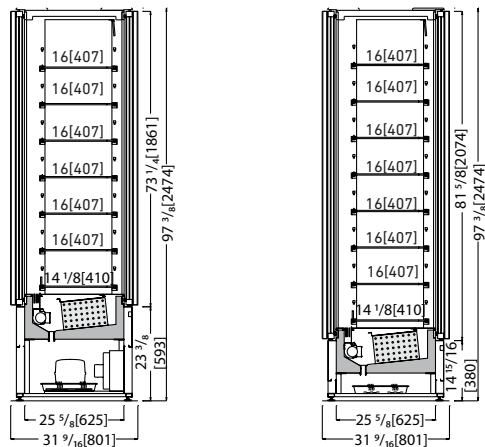

Technical



- Ventilated
- R452A
- Hermetic
- Led no-spot 3000°K
- Automatic
- N.4 / H.R.55% / 30°C
- 230V / 1ph / 50Hz
- 39.2 / 46.4°F

Data Sheet

\*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation

\*Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion BTU / °F	GAS Type
BRL2PVT1PI	27 9/16 x 27 1/16 x 97 3/8	573	1100/6,0	0,7	2900 / 14	R452A
	34 5/8 x 41 1/4 x 108 13/16	287				
BRL2PVT2PI	54 5/8 x 27 1/16 x 97 3/8	860	1350/6,9	0,9	4948 / 14	R452A
	61 3/4 x 41 1/4 x 108 13/16	507				
BRL2DTT2PI	54 5/8 x 27 1/16 x 97 3/8	860	2100/12,0	1,4	2388+2388 / 14	R452A
	61 3/4 x 41 1/4 x 108 13/16	507				

Optionals:

