




Cold Applications Self-Service Showcase

Self-service refrigerated Grab&Go, positive temperature | monolithic insulated tank with ecological polyurethane and covered in stainless steel | refrigeration with forced air circulation on all display levels | programmed automatic defrosts | built - in hermetic condensing unit | electronic control unit | bottom tray and back wall in polished steel | shelves in polished stainless steel adjustable on vertical rack | double glazing sides with black serigraphy | lighting on all shelves with strip-led no spot 3000°K | technical compartment and basement in stainless steel | stainless steel feet adjustable in height.



35.6/46.4°F



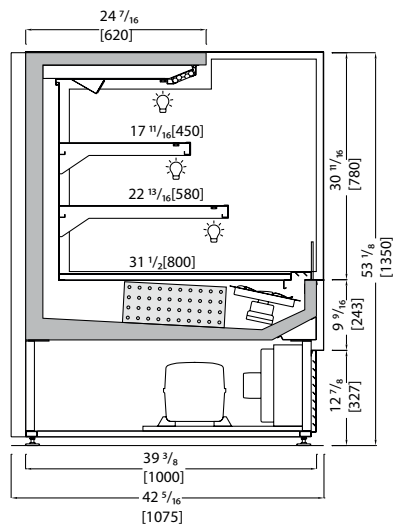

Technical



- Ventilated
- R452A
- 1 / Hermetic
- Led no-spot3000°K
- Automatic / electrical
- N. 3 / RH 55% max 75°F
- 220 V / 1 ph / 60 Hz
- 35.6/46.4°F

Data Sheet

Measure are subject to revisions/updates, please refer to manufacturing drawing at order confirmation

*Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU/F	GAS Type
GAGP10PVT10H131	39 3/8 x 42 5/16 x 53 5/16 46 7/16 x 49 7/16 x 64 3/4	419 276	1500/7,5	1,0	1900 / -10	R452A
GAGP10PVT12H131	47 1/4 x 42 5/16 x 53 5/16 54 5/16 x 49 7/16 x 64 3/4	551 320	1700/8,2	1,2	7507 / 14	R452A
GAGP10PVT15H13	53 5/16 x 42 5/16 x 53 5/16 66 1/8 x 49 7/16 x 64 3/4	300 175	1800/8,5	1,4	8019 / 14	R452A
GAGP10PVT18H131	70 7/8 x 42 5/16 x 53 5/16 77 15/16 x 49 7/16 x 64 3/4	370 205	2000/10,0	1,5	9213 / 14	R452A
GAGP10PVT20H131	78 3/4 x 42 5/16 x 53 5/16 85 13/16 x 49 7/16 x 64 3/4	860 494	2200/11,0	1,6	10236 / 14	R452A
GAGP10PVT24H131	94 1/2 x 42 5/16 x 53 5/16 101 9/16 x 49 7/16 x 64 3/4	948 595	3300/15,5	2,1	13307 / 14	R452A

Optionals:

- PV303
Interior powder-coated
- PV304
Exterior powder-coated
- CVG01
Canalization with glass divider
- SHELFT5
Float/fumè glass shelves
- SHELFT7
Solid oak wood shelf
- CIT46
Remote assistance
- SAN01
Tube sanitization system