

HANGING GRAB&GO_{Open}

CIAM

GLASSES

Standard
- double glazed glass,
black screen-printing

Optional
- custom RAL color
screen-printing

INTERIORS

Standard
- polished s/s

Optionals
- powder-coated s/s

PANELS

Standard
- polished s/s

Optional
- powder coated s/s




Hanging Grab&Go Open

Refrigerated wall cabinet, positive temperature (39.2 °F) | monolithic insulated tank with ecological polyurethane and covered in stainless steel | refrigeration with forced air circulation on all display levels | programmed automatic defrosts | remote hermetic condensing unit | electronic control unit | double glazing sides with black serigraphy | roller blind in micro - fabric | bottom tray and back wall in polished steel | shelves in polished steel adjustable on vertical rack | lighting on all shelves with strip-led no spot 3000°K



39.2 °F



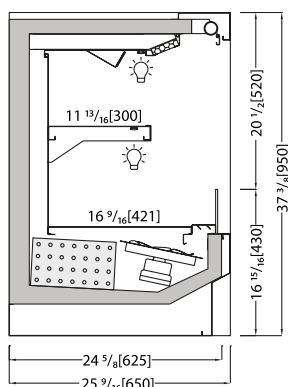

Technical




Ventilated	Automatic
R452A	N. 3 / RH 55% max 75°F
1 / Hermetic	120 V / 1 ph / 60 Hz
Led 3.000°K	39.2 °F

Data Sheet


*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Crate weight only

	Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
	HGAGOPVT10E	40 5/16 x 25 9/16 x 37 3/8 48 13/16 x 32 11/16 x 44 1/2	309 132	950/5,9	0,7	2730 / 14	R452A
	HGAGOPVT12E	48 13/16 x 25 9/16 x 37 3/8 55 7/8 x 32 11/16 x 44 1/2	375 150	1250/6,5	0,8	3412 / 14	R452A
	HGAGOPVT15E	60 5/8 x 25 9/16 x 37 3/8 63 3/4 x 32 11/16 x 44 1/2	375 168	1350/6,9	0,8	4095 / 14	R452A
	HGAGOPVT20E	80 5/16 x 25 9/16 x 37 3/8 87 3/8 x 32 11/16 x 44 1/2	463 231	1500/7,5	1	4777 / 14	R452A

Optionals:



PV303
Interior powder-
coating




PV304
Exterior powder-
coating



AISI316
Anti-corrosion steel
AISI 316



MCDL
Dimmer control for
LED lighting



CIT16
Condensation water
pan



CIT46
Remote assistance