




Refrigerated, Cold Applications, flush-wall cabinet

Molded heat-insulated tank made of ecological polyurethane coated with AISI 304 s/s | ceiling system with ventilated refrigeration system on all display levels | automatic defrost | remote hermetic condensing unit | digital control panel integrated in the door frame | 'zero' flush doors with mirror screen printing | bottom trays in mirrored glass | back and internal sides in mirrored glass with magnetic hook | glass shelves adjustable on racks | indirect lighting incorporated on the door frame with no spot 3000°K striped | tubular steel base with height-adjustable feet.

35.6 / 46.4°F



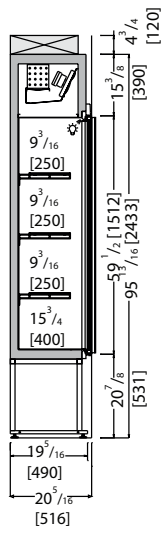

Technical



- Ventilated
- R452A
- Hermetic
- Led no-spot 3000°K
- Automatic / electrical
- N.4 / RH 55% max 75°F
- 220V / 1ph / 60Hz
- 35.6 / 46.4°F

Data Sheet *Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU/F	GAS Type
MRL0TPP1PE	32 ¹¹ / ₁₆ x 20 ⁵ / ₁₆ x 102 ³ / ₈ 39 ³ / ₄ x 27 ³ / ₈ x 109 ⁷ / ₁₆ 220	419	1000/5,9	0,65	2730 / 14	R452A
MRL0TPP2PE	61 ¹ / ₈ x 20 ⁵ / ₁₆ x 102 ³ / ₈ 68 ³ / ₁₆ x 27 ³ / ₈ x 109 ⁷ / ₁₆ 375	551	1380/6,8	0,9	4777 / 14	R452A
MRL0TPP3PE	89 ¹ / ₂ x 20 ⁵ / ₁₆ x 102 ³ / ₈ 96 ⁵ / ₈ x 27 ³ / ₈ x 109 ⁷ / ₁₆ 529	683	1900/10,0	1,3	6483 / 14	R452A
MRL0TPP4PE	117 ⁵ / ₁₆ x 20 ⁵ / ₁₆ x 102 ³ / ₈ 125 ¹ / ₁₆ x 27 ³ / ₈ x 109 ⁷ / ₁₆ 639	882	2300/11,5	1,5	8189 / 14	R452A

Optionals:

- RMCP1-4
Custom wallpa per cladding
- RMGR1-4
Custom grés cladding
- RMRAL01
Custom RAL cladding
- SHEFLT6
Wine shelves
- SERVERT
Key lock
- SERVERT01
Electronic lock
- CIT46
Remote assistance
- CIT37
Converter device from 0° to 39.2°F
- MCDL
Dimmer control for LED lighting