




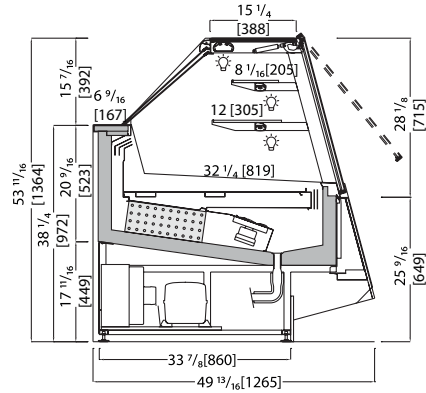
Ventilated refrigeration on all display levels

Front double-glazed inclined at 15° heated and upwards openable | sides in double-glazed glass | "black" screen printing | profiles in polished aluminium | n.02 intermediate shelves complete with lighting | no spot 3000°K led lighting | operator compartment with PETG easy sliding | tank insulated with ecological polyurethane and covered in stainless steel | ventilated refrigeration adjustable on several display levels by means of a three-position selector switch | automatic electric defrosting | electronic control unit and digital temperature reader flush with the worktop | display trays in polished steel | worktop in polished steel | supporting frame in painted steel with height adjustable stainless steel feet











 39.2 °F

















Technical




-  Ventilated
-  Electrical
-  R452A
-  N. 4 / RH 55% max
75 °F
-  Hermetic
-  120 V / 1 ph / 60 Hz
-  Led 3.000°K
-  39.2 °F


Data Sheet *Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
 MYA2PV115 (+ PANELS)	45 1/4 x 46 5/16 x 53 11/16  52 3/8 x 53 7/16 x 65 1/8	573  331	1100/6,9	0,75	3173 / 14	R452A
 MYA2PV165I (+ PANELS)	64 15/16 x 46 5/16 x 53 11/16  72 1/16 x 53 7/16 x 65 1/8	772  452	1300/7,8	0,75	3958 / 14	R452A
 MYA2PV215I (+ PANELS)	84 5/8 x 46 5/16 x 53 11/16  91 3/4 x 53 7/16 x 65 1/8	882  584	1600/8,9	1,1	4913 / 14	R452A
 MYA2PVAP45I (+ PANELS) 45° R2544	R100 3/16 x 46 5/16 x 53 11/16  59 7/16 x 53 7/16 x 65 1/8	728  375	1300/7,8	0,85	4095 / 14	R452A


Optionals:




CAPRIS115-215
Heated top glass




CIV97
Heated glass side




CIV50-52
Hot glass shelf with electronic control




CIV57
Glass divider for display area




CIV72
Chocolate refrigeration system




MSE01
Electric defrost



Multix +2/+16/+40
MX01
Multix system



CIT46
Remote assistance



GRAFIX
Graphic on front panel