




Ventilated refrigerated showcase on all display levels

Front double-glazed inclined at 15° heated and upwards openable | sides in double-glazed glass | "black" screen printing | profiles in polished aluminium | n.03 intermediate shelves complete with lighting | no spot 3000°K led lighting | operator compartment with PETG easy sliding | tank insulated with ecological polyurethane and covered in stainless steel | ventilated refrigeration adjustable on several display levels by means of a three-position selector switch | automatic electric defrosting | electronic control unit and digital temperature reader flush with the worktop | display trays in polished steel | worktop in polished steel | supporting frame in painted steel with height adjustable stainless steel feet



39.2°F



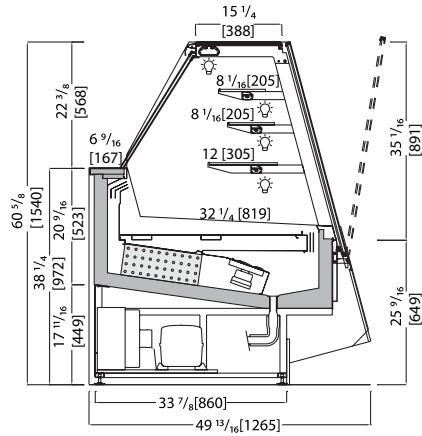

Technical



- Ventilated
- Electrical
- R452A
- N. 4 / RH 55% max 75 °F
- Hermetic
- 120 V / 1 ph / 60 Hz
- Led 3.000°K
- 39.2 °F

Data Sheet *Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Create weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
MYA3H15PV1151 (+PANELS)	45 1/4x46 5/16x60 5/8 52 3/8x53 7/16x72 1/16	573 364	1100/6,9	0,75	3173 / 14	R452A
MYA3H15PV1651 (+PANELS)	64 15/16x46 5/16x60 5/8 72 1/16x53 7/16x72 1/16	772 507	1300/7,8	0,75	3958 / 14	R452A
MYA3H15PV2151 (+PANELS)	84 5/8x46 5/16x60 5/8 91 3/4x53 7/16x72 1/16	882 639	1600/8,9	1,1	4913 / 14	R452A

Optionals:

- CAPRIS115-215 Heated top glass
- CIV97 Heated glass side
- CIV50-52 Hot glass shelf with electronic control
- CIV57 Glass divider for display area
- CIV72 Chocolate refrigeration system
- MSE01 Electric defrost
- MX01 Multix system
- CIT46 Remote assistance
- GRAFIX Graphic on front panel