

STANDARD Ventilated

CIAM



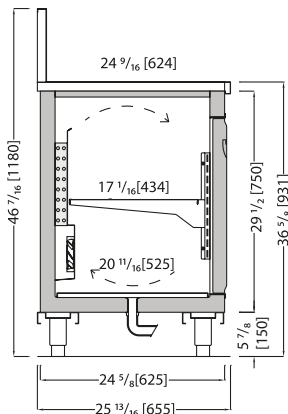
Ventilated

S/s adjustable feet | gray galvanized-steel frame support | compressor housing in s/s steel | AISI 304 s/s module with BA external finish and 2B internal s/s | rounded corners inside the module | heat-insulation with ecological polyurethane foam | unfinished top support | intermediate and adjustable s/s shelves | removable s/s bottom deck | heat-insulated doors in polish finish | sides pre-arranged for refrigeration, electrical pipes and water inlet and outlet (patented system) | ventilated refrigeration with finned evaporator; capillary tube connection to the condensing unit or thermostatic valve when the condensing unit is remote | thermostatic valve is supplied connected | digital control panel











 39.2 /46.4 °F






Technical












-  Ventilated
-  Automatic
-  R290 / R452A
-  N. 4 / RH 55% max 75°F
-  1 / Hermetic
-  120 V / 1 ph / 60 Hz
-  -
-  39.2 / 46.4 °F

Data Sheet *Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation  *Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
 BRPVF1P6H7TI	39 3/8x25 13/16x46 7/16  46 7/16x32 7/8x57 7/8	170  165	335/2,0	0,16	614 / 6.8	R290 / R452A
 BRPVF2P6H7TI	59 1/16x25 13/16x46 7/16  66 1/8x32 7/8x57 7/8	236  234	335/2,0	0,16	955 / 6.8	R290 / R452A
 BRPVF3P6H7TI	78 3/4x25 13/16x46 7/16  85 13/16x32 7/8x57 7/8	315  304	405/2,5	0,2	1262 / 6.8	R290 / R452A
 BRPVF4P6H7TI	98 7/16x25 13/16x46 7/16  105 1/2x32 7/8x57 7/8	395  375	520/3,5	0,25	1331 / 6.8	R290 / R452A
 BRPVF5P6H7TI	118 1/8x25 13/16x46 7/16  125 3/16x32 7/8x57 7/8	474  445	625/3,5	0,3	1535 / 6.8	R290 / R452A

Optionals:

- 
CIFAL17S
 Double glazed door
- 
CIFAM13S
 s/s double drawers 1/2-1/2
- 
CIFAZ15S
 s/s double drawers 1/3-2/3
- 
CIFAR12S
 s/s triple drawers
- 
CIFAMV13S
 Glass double drawer 1/2 -1/2
- 
SER01
 Lock on doors and drawers
- 
LED lighting 3000K CIR27
 LED lighting 3000K
- 
CIT16
 Condensation water pan
- 
CIM08
 Kit wheels