



GLASSES

Standard
- heated double glazed glass,
mirror screen-printing
- front glass with upward
opening

INTERIORS


Standard
- polish s/s


PANELS

Standard
- HPL black / white / gray
Optional
- HPL RAL

Gelato Showcase

Frontal heated double-glazed glass, upward servo-assisted opening | sides in heated double-glazed glass and with mirror screen printing | laminated heated glass top | bright aluminium mirror profiles | no-spot 3000°K led lighting | operator compartment with PETG easy sliding | Tank insulated with ecological polyurethane and covered in stainless steel | ventilated refrigeration with airflow | reverse cycle defrost | electronic control unit and digital temperature reader flush with the worktop | worktop in polished steel | pre-arrangement for pans dim. $14 \frac{3}{16} \times 6 \frac{1}{2} \times 4 \frac{3}{4}$ [360x165x120] not supplied | backlit ice cream flavor tags | supporting frame in galvanized steel with height adjustable stainless steel feet



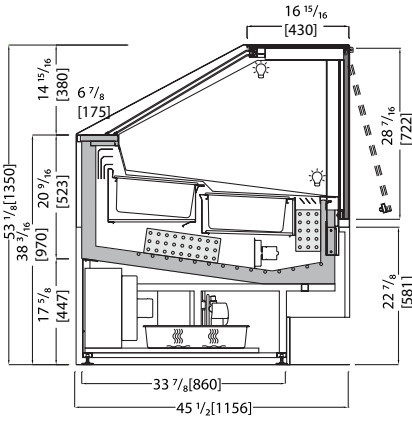

Technical



- Ventilated
- R452A
- Semi-Hermetic
- Led 3.000°K
- Automatic/reverse cycle
- N. 4+ / RH 55% max 75 °F
- 220 V / 3 ph / 60 Hz
- 0°F

Data Sheet*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Create weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
ICQBL2GEL121 (+PANELS)	45 1/4x45 1/2x53 1/8 52 3/8x52 5/8x64 9/16	639 320	1800/4,5	1	2730 / -32.8	R452A
ICQBL2GEL181 (+PANELS)	64 15/16x45 1/2x53 1/8 72 1/16x52 5/8x64 9/16	794 441	2800/7,0	1,3	3856 / -32.8	R452A
ICQBL2GEL241 (+PANELS)	84 5/8x45 1/2x53 1/8 91 3/4x52 5/8x64 9/16	1014 562	3400/8,5	1,8	4913 / -32.8	R452A
ICQBL2GEL12+121 (+PANELS)	84 5/8x45 1/2x53 1/8 91 3/4x52 5/8x64 9/16	1036 562	3600/10,0	1,9	2730+2730 / -32.8	R452A

Optionals:

- CIV05-06:12
s/s trays for ice-cream cakes
- GSG01
Stick ice-cream rack
- CIV61
s/s pan mm. 14 3/16x6 1/2x4 3/4
- CIV63
s/s pan mm. 14 3/16x9 13/16x3 1/8
- CIV56
s/s dipper well
- CIV18-20
Roller night blind
- CIT37
Converter device from 0° to 39.2°F
- CIT46
Remote assistance
- CIM08
Kit wheels