




## Ventilated refrigerated showcase

Frontal heated double-glazed glass, upward servo-assisted opening | sides in double-glazed glass and with mirror screen printing | laminated heated glass top | n.02 intermediate shelves complete with lighting | bright aluminium mirror profiles | no-spot 3000°K led lighting | operator compartment with PETG easy sliding | Tank insulated with ecological polyurethane and covered in stainless steel | ventilated refrigeration adjustable on several display levels by means of a three-position selector switch | automatic electric defrosting | electronic control unit and digital temperature reader flush with the worktop | display trays in polished steel | worktop in polished steel | supporting frame in painted steel with height adjustable stainless steel feet



39.2°F



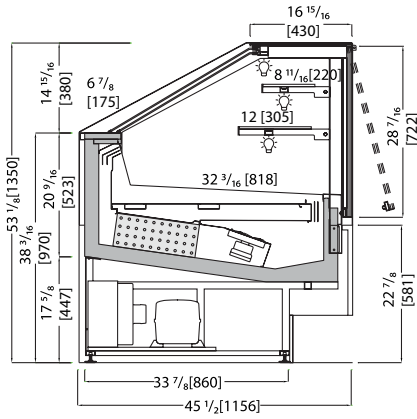

Technical



- Ventilated
- R452A
- Hermetic
- Led 3.000°K
- Electrical
- N. 4 / RH 55% max 75 °F
- 120 V / 1 ph / 60 Hz
- 39.2 °F

Data Sheet \*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation \*Create weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
ICQBL2PV1151 (+PANELS)	45 1/4 x 45 1/2 x 53 1/8 52 3/8 x 52 5/8 x 64 9/16	419 320	1000/6,5	0,7	3071 / 14	R452A
ICQBL2PV1651 (+PANELS)	64 15/16 x 45 1/2 x 53 1/8 72 1/16 x 52 5/8 x 64 9/16	573 441	1300/8,5	0,8	3753 / 14	R452A
ICQBL2PV2151 (+PANELS)	84 5/8 x 45 1/2 x 53 1/8 91 3/4 x 52 5/8 x 64 9/16	772 562	1500/10,0	0,85	4436 / 14	R452A

Optionals:

- CAPRIS115-215 Heated top glass
- CIV97 Heated glass side
- CIV50-52 Hot glass shelf with electronic control
- CIV57 Glass divider for display area
- CIV72 Chocolate refrigeration system
- MSE01 Electric defrost
- MX01 Multix system
- CIT46 Remote assistance
- GRAFIX Graphic on front panel