

## GLASSES

- Standard
  - heated curved front glass, upward opening
  - heated stratified side glasses

## INTERIORS

- Standard
  - polish s/s
- Optionals
  - powder-coated s/s

## PANELS

- Standard
  - HPL black / white / gray
- Optional
  - HPL RAL




## Ventilated Refrigerated Showcase

Curved single front glass heated and openable upwards | sides in laminated glass heated | n.02 intermediate shelves complete with lighting | bright aluminium profiles | no spot 3000°K led lighting | operator compartment with PETG easy sliding | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration and thermostatic valve | automatic electronic defrosting | electronic control unit and digital temperature reader | display trays in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet

39.2°F



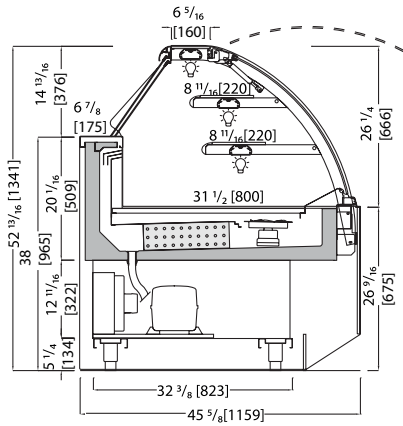

Technical



- Ventilated
- Electrical
- R452A
- N. 4 / RH 55% max 75 °F
- Hermetic
- 120 V / 1 ph / 60 Hz
- Led 3.000°K
- 39.2 °F

Data Sheet \*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation \*Create weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
SPC2PV1111 (+PANELS)	43 11/16x45 1/16x52 13/16 50 13/16x52 3/16x64 1/4	496 309	1000/6,5	0,75	2559 / 10.4	R452A
SPC2PV1611 (+PANELS)	63 3/8x45 1/16x52 13/16 70 1/2x52 3/16x64 1/4	661 430	1200/8,0	0,85	3242 / 10.4	R452A
SPC2PV2111 (+PANELS)	82 15/16x45 1/16x52 13/16 90x52 3/16x64 1/4	827 551	1400/8,0	1	4229 / 10.4	R452A
SPC2PVAP30I (+PANELS) 30° R3106	R119 3/4x45 1/16x52 13/16 70 1/16x52 3/16x64 1/4	595 430	1200/8,0	0,85	3071 / 10.4	R452A
SPC2PVCH30I (+PANELS) 30° R1896	R77 3/16x45 1/16x52 13/16 66 15/16x52 3/16x64 1/4	595 408	1200/8,0	0,85	3071 / 10.4	R452A

Optionals:

- Drawers for space
- CIV50-52 Hot glass shelf with electronic control
- PVP01-03 Epoxy painted profiles
- Heated glass box for pastry
- Static refrigeration
- CIV72 Chocolate refrigeration system
- MSE01 Electric defrost
- Multix +2/+16/+40
- MX01 Multix system
- CIT46 Remote assistance