

## SIDES

- Standard
  - Solid Side Panels
- Optional
  - Double Paned Glass Panels

## INTERIORS

- Standard
  - RAL-7021 Black-Grey
- Optional
  - Custom RAL color

## DOORS


- Standard
  - Premium doors heated triple glazed glass
  - black serigraphy
- Optional
  - Custom RAL color serigraphy


## PANELS

- Standard
  - RAL-7021 Black-Grey
- Optional
  - Custom RAL color

## Freezer Merchandiser

Molded heat-insulated tank made of ecological polyurethane coated with AISI 304 s/s | ceiling ventilated refrigeration system on all display levels | automatic defrost | remote condensing unit | digital control panel | double glazed glass sides | 'premium' doors with RAL 7021 serigraphy | bottom tray and back in powder coated steel RAL 7021 | shelves in powder coated steel RAL 7021 adjustable on racks | indirect lighting incorporated in the door frame with no spot 3000°K strip-led | s/s feet adju-stable in height



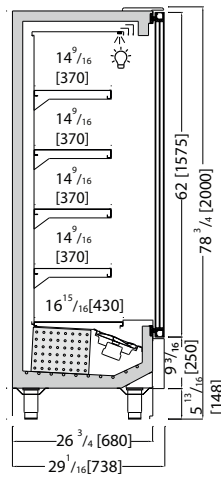

Technical



- Ventilated
- Automatic / reverse cycle
- R452A
- N. 4 / RH 55% max 30°C
- Semi-Hermetic
- 220 V / 3 Ph / 60 Hz+N
- Led no-spot 3000°K
- 0°F

Data Sheet \*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation \*Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
MURL6GEL6E	27 9/16 x 29 1/8 x 78 3/4 34 5/8 x 36 3/16 x 90 3/16	397 209	2100 / 4,6	0.9	2730 / -32.8	R452a
MURL6GEL12E	51 3/16 x 29 1/8 x 78 3/4 58 1/4 x 36 3/16 x 90 3/16	617 353	3100 / 6,5	1.2	4095 / -32.8	R452a
MURL6GEL18E	74 13/16 x 29 1/8 x 78 3/4 81 7/8 x 36 3/16 x 90 3/16	772 485	3900 / 11,0	1.9	5459 / -32.8	R452a

\*\*If the merchandiser will be connected to a rack system, the supplied rack system *must* have a hot-gas defrost feature.  
 \*\*If the merchandiser is connected to a rack system, the electrical phase will be 1-Ph *instead of* 3-Ph.  
 \*\*Dimensions are for merchandisers with glass sides panels; Solid side panels are 1-5/8" thick each.

Optionals:

- FCCL01/02  
Solid sides
- CIT46  
Remote assistance
- CIT37  
Converter device from 0°F to 39.2°F
- SERVERT01  
Electronic lock