




Ventilated refrigerated showcase on all display levels

Fixed double glazed glass case | "black" silkscreen printing | polished aluminium profiles | nr. 3 intermediate shelves with lighting adjustable on low-voltage electrified rack system | operator-side closing with double-glazed glass sliding doors | heated front glass | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration on each display level | capillary system (thermostatic valve for external motor) | automatic defrosting | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | supporting frame in galvanized steel with heightadjustable stainless steel feet

+39.2°F / +42.8°F



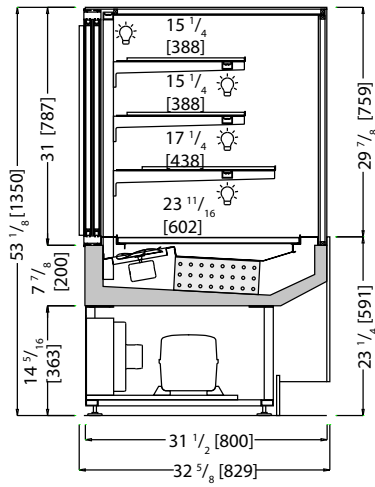

Technical



- Ventilated
- Automatic
- R452A / R290 ECO Friendly
- Hermetic
- N. 4 / RH 55% max 75 °F
- Led no-spot 3000°K
- 120 V / 1 Ph / 60 Hz
- +39.2/+42.8°F

Data Sheet *Measurements are subject to revisions/updates, please refer to manufacturer's drawing at order confirmation *Crate weight only

| Model Code | Dimensions L x D x H Inches | Weight Lbs | Max Pwr. Consumption W / A | Avg Operating Consumption KW/H | Cooling Power/Expansion BTU / °F | GAS Type |
|------------------|--|------------|----------------------------|--------------------------------|----------------------------------|----------|
| TRT3P8PV090I | 35 7/16 x 32 5/8 x 53 1/8 42 1/2 x 39 3/4 x 63 3/4 | 309 198 | 550 / 3.1 | 0.3 | 1706 / 14 | R290 |
| TRT3P8PV120I | 47 1/4 x 32 5/8 x 53 1/8 54 5/16 x 39 3/4 x 63 3/4 | 375 254 | 600 / 3.8 | 0.4 | 2320 / 14 | R290 |
| TRT3P8PV150I | 59 1/16 x 32 5/8 x 53 1/8 66 1/8 x 39 3/4 x 63 3/4 | 397 309 | 800 / 4.5 | 0.5 | 2900 / 14 | R290 |
| TRT3P8PV200I | 78 3/4 x 32 5/8 x 53 1/8 85 13/16 x 39 3/4 x 63 3/4 | 441 529 | 1100 / 6.0 | 0.6 | 3753 / 14 | R290 |
| TG3P8PV AP90QRDI | (59 1/16 x 78 3/4) x 32 5/8 x 53 1/8 63 x 82 11/16 x 63 3/4 | 772 606 | 1600 / 8.5 | 1.1 | 6142 / 14 | R452a |
| TG3P8PV AP90QRSI | (78 3/4 x 59 1/16) x 32 5/8 x 53 1/8 82 11/16 x 63 x 63 3/4 | 772 606 | 1600 / 8.5 | 1.1 | 6142 / 14 | R452a |

Optionals:

- TEC05
Frameless glass box
- SERIG01
Serigraphy RAL color
- TRTVC01
Heated glass
- SCTORT00-03
Sliding doors on customer side
- BRDTR01-02
Inox profiles
- TRTVA90-150
Lift-up front glass
- CIVF117
Perimetral top for drop-in config.
- CIT16
Condensation water pan
- CIM08
Kit wheels