




Ventilated Refrigerated Showcase.

Innovative patented glass structure | heated glass sides | sliding glass top on operator side with soft closing system and folding glass opening with magnetic clamps | glass top on customer side with upward opening | front and side LED light fixture | bright aluminum profiles | Tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with capillary system (thermostatic valve for external motor) | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel



35.6°F / 36.4°F



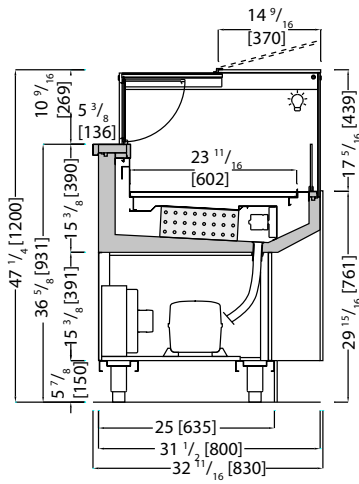

Technical



- Ventilated
- R290 ECO Friendly
- Hermetic
- Led no-spot 3000°K
- Automatic
- N. 4 /RH 55% max 75 °F
- 120 V / 1 Ph / 60 Hz
- 35.6°F / 46.4°F

Data Sheet

*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion BTU / °F	GAS Type
SQ8G1RV090I (+PANELS)	35 7/16 x 32 11/16 x 47 1/4 42 1/2 x 39 3/4 x 58 11/16	231 176	550 / 3.3	0.3	1467 / 14	R290
SQ8G1RV100I (+PANELS)	39 3/8 x 32 11/16 x 47 1/4 46 1/4 x 39 3/4 x 58 11/16	231 198	550 / 3.3	0.3	1467 / 14	R290
SQ8G1RV130I (+PANELS)	51 3/16 x 32 11/16 x 47 1/4 58 1/4 x 39 3/4 x 58 11/16	287 243	620 / 3.5	0.35	2150 / 14	R290
SQ8G1RV150I (+PANELS)	59 1/16 x 32 11/16 x 47 1/4 66 1/8 x 39 3/4 x 58 11/16	287 287	620 / 3.5	0.35	2150 / 14	R290
SQ8G1RV170I (+PANELS)	66 15/16 x 32 11/16 x 47 1/4 74 x 39 3/4 x 58 11/16	353 331	710 / 3.8	0.4	2354 / 14	R290
SQ8G1RV200I (+PANELS)	78 3/4 x 32 11/16 x 47 1/4 85 13/16 x 39 3/4 x 58 11/16	397 375	850 / 4.5	0.5	2764 / 14	R290
SQ8G1RV210I (+PANELS)	82 11/16 x 32 11/16 x 47 1/4 89 3/4 x 39 3/4 x 58 11/16	397 386	850 / 4.5	0.5	2764 / 14	R290

Optionals:

CIV65-68 Stationary shelf option	CIV96 LED lighting for shelf	VRG01 Heated front	SCORTF01-03 L-shaped doors	CIV72 Chocolate	SRVASS01 Lift-up	CIT16 Condensation water pan	CIM08 Kit wheels	SAN01 Whide system