

SIDES

- Standard
 - Solid
- Optional
 - Double glazed glass Sides

DOORS

- Standard
 - "Premium" doors
 - Triple glazed glass
 - Black screen-printing
- Optional
 - Custom RAL screen-printing
 - heated glass

INTERIORS


- Standard
 - Black & White powder-coated
- Optional
 - Custom RAL color


PANELS

- Standard
 - Black & White powder-coated
- Optional
 - Custom RAL color

Refrigerated wall cabinet at frozen temperature

Molded heat-insulated tank made of ecological polyurethane coated with AISI 304 s/s | ceiling system with ventilated refrigeration on all display levels | remote hermetic condensing unit | automatic defrost | digital control panel | s/s sides | 'premium' doors without central upright with RAL 7021 screen printing and additional lighting integrated on the door | bottom tray in backpainted glass | back in powder coated steel RAL 7021 | shelves in powder coated steel RAL 7021 adjustable on rack | indirect lighting intergrated on the door frame with no spot 3000°K strip-led | base of counter in s/s | s/s feet adjustable in height



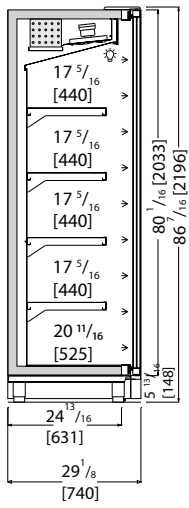

Technical



- Ventilated
- Automatic / reverse cycle
- R452A
- N. 4 / RH 55% max 75°F
- Semi-Hermetic
- 220 V / 3 Ph / 60 Hz+N
- Led no-spot 3000°K
- 0°F

Data Sheet

*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation

*Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
EXL74SGEL6E	27 ⁹ / ₁₆ x 29 ¹ / ₈ x 86 ⁷ / ₁₆ 34 ⁵ / ₈ x 36 ¹ / ₄ x 97 ⁷ / ₈	397 220	2100 / 4,6	0,9	3071 / -32.8	R452a
EXL74SGEL12E	51 ³ / ₁₆ x 29 ¹ / ₈ x 86 ⁷ / ₁₆ 58 ¹ / ₄ x 36 ¹ / ₄ x 97 ⁷ / ₈	661 375	3600 / 7,1	1,6	4436 / -32.8	R452a
EXL74SGEL18E	74 ¹³ / ₁₆ x 29 ¹ / ₈ x 86 ⁷ / ₁₆ 81 ⁷ / ₈ x 36 ¹ / ₄ x 97 ⁷ / ₈	1102 529	4500 / 15,5	2,0	5801 / -32.8	R452a
EXL74SGEL24E	98 ⁷ / ₁₆ x 29 ¹ / ₈ x 86 ⁷ / ₁₆ 105 ¹ / ₂ x 36 ¹ / ₄ x 97 ⁷ / ₈	1102 683	5500 / 17,5	2,3	6284 / -32.8	R452a

Optionals:

- FVMUR01 Side with glass window
- VRVCP/F/S Heated double glazing
- CZ01 Back panel
- SHEFLT5 Float/fumé glass shelves
- SLIDED00R1-6 Slide doors
- PREMIUMD00R1/2/C PREMIUM door
- SERVERT01 Electronic lock
- TOUCH Touch panel
- MCDL Dimmer control for LED lighting
- CIT37 Switch from 0°F to 39.2°F
- CIT46 Remote assistance
- SANO Tube antibacterial sanitization system