





## Static drop in refrigerated counters H590

S/s adjustable feet | gray galvanized-steel frame support | Drop in refrigerated module with BA finished steel external finish and 2B internal s/s | Heat-insulation with ecological polyurethane foam | pre-arrangement for 8 Lt round tubs dim. mm. Ø200-250h not supplied | static refrigeration with coil into the sides and thermostatic valve, when the condensing unit is remote the valve is supplied connected, pipes are supplied when the condensing unit is connected | digital control panel



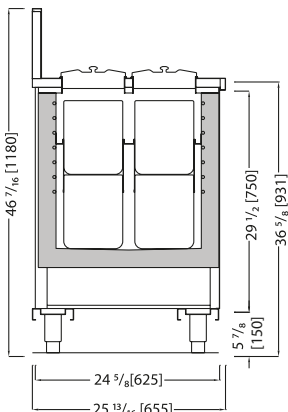

Technical




- ❄️ Static
- 🔌 Manual / switching off
- 🔋 R452A
- 💧 N. 4 / RH 55% max 75°F
- 🔌 1 / Hermetic
- 🔌 220 V / 1 ph / 60 Hz
- 💡 -
- 🌡️ 0°F

Data Sheet \*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation \*Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
BPRS2+2H5TI	39 3/8x25 13/16x46 7/16 46 7/16x32 7/8x57 7/8	132 159	206/1,6	0,15	205 / -31	R452A
BPRS4+4H5TI	49 3/16x25 13/16x46 7/16 56 5/16x32 7/8x57 7/8	163 194	400/3,0	0,2	358 / -31	R452A
BPRS6+6H5TI	59 1/16x25 13/16x46 7/16 66 1/8x32 7/8x57 7/8	216 227	640/3,0	0,32	546 / -31	R452A
BPRS8+8H5TI	68 7/8x25 13/16x46 7/16 76x32 7/8x57 7/8	273 260	545/2,5	0,25	717 / -31	R452A
BPRS10+10H5TI	78 3/4x25 13/16x46 7/16 85 13/16x32 7/8x57 7/8	331 295	640/3,5	0,3	648 / -31	R452A

Optionals:

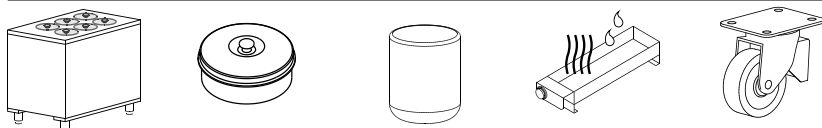

- CPFINOX/GRES/  
WOOD  
Pozzetti counter lids  
flush with the top
- CIFCO2D  
Round lid with ring  
frame
- CIFCP21  
Ice-cream cylindrical  
container
- CIT16  
Condensation water  
pan
- CIM08  
Kit wheels



**CIAM Spa**  
Viale dei Pini, 9 - 06081 Petrignano di Assisi - PG, Italy  
T +39 075 80161 - info@ciamgroup.it - www.ciamweb.it

