





Ventilated drop in

S/s adjustable feet | gray galvanized-steel frame support | Drop in refrigerated module with BA finished steel external finish and 2B internal s/s | Heat-insulation with ecological polyurethane foam | pre-arrangement for 8 Lt round tubs dim. mm. Ø200-250h not supplied | ventilated refrigeration with coil into the sides and thermostatic valve, when the condensing unit is remote the valve is supplied connected, pipes are supplied when the condensing unit is connected | digital control panel



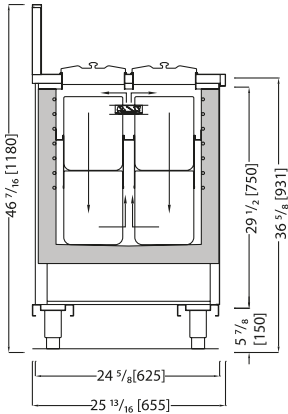

Technical



- Ventilated
- R452A
- 1 / Hermetic
-
- Manual / switching off
- N. 4 / RH 55% max 75°F
- 220 V / 1 ph / 60 Hz
- 0°F

Data Sheet *Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
BPV4+4P65H7TI	49 3/16x25 13/16x46 7/16 56 5/16x32 7/8x57 7/8	163 134	470/3,0	0,25	580 / -31	R452A
BPV6+6P65H7TI	59 1/16x25 13/16x46 7/16 66 1/8x32 7/8x57 7/8	216 181	640/3,0	0,32	1024 / -31	R452A
BPV8+8P65H7TI	68 7/8x25 13/16x46 7/16 76x32 7/8x57 7/8	317 209	820/4,0	0,4	1365 / -31	R452A
BPV10+10P65H7TI	78 3/4x25 13/16x46 7/16 85 13/16x32 7/8x57 7/8	507 236	1000/6,5	0,55	1706 / -31	R452A

Optionals:

- CPFINOX/GRES/ WOOD
Pozzetti counter lids flush with the top
- CIFCO2D
Round lid with ring frame
- CIFCP21
Ice-cream cylindrical container
- CIT16
Condensation water pan
- CIM08
Kit wheels



CIAM Spa
Viale dei Pini, 9 - 06081 Petrignano di Assisi - PG, Italy
T +39 075 80161 - info@ciamgroup.it - www.ciamweb.it

