



GLASSES

- Standard
 - Double glass, black serigraphy
 - Black painted glass top, black serigraphy
- Optional
 - Custom serigraphy RAL color

INTERIORS


- Standard
 - Polished s/s
- Optional
 - Acrylic
 - Grès
 - Epoxy painted s/s

PANELS

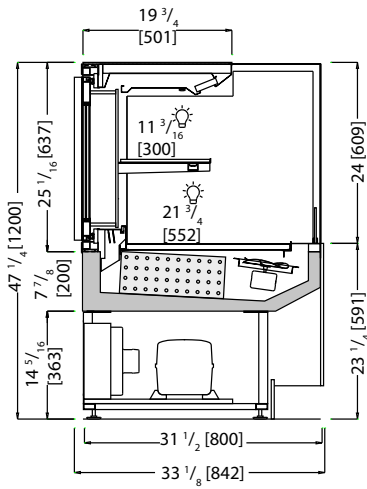
- Standard
 - HPL black/white/gray
- Optional
 - HPL RAL

Ventilated Refrigeration Self-Service Showcase

Double-glazed sides | "black" silkscreen printing | polished aluminum profiles | intermediate shelf with lighting adjustable on low-voltage electrified rack system | operator-side closing with "Zero" type hinged door flush with the structure and integrated PETG perforated screens without central upright | tank insulated with ecological polyurethane and covered in stainless steel | electronic control unit and digital temperature reader flush with the surface | display tray and perimeter shelf in polished steel | refrigeration with fan ventilated refrigeration system on all display levels | programmed automatic defrosting | built-in hermetic condensing unit | supporting frame in galvanized steel with height adjustable stainless steel feet

 +39.2°F / +42.8°F















Technical








-  Ventilated
-  Automatic
-  R452A
-  N. 3 / RH 60% max
75 °F
-  Hermetic
-  120 V / 1 Ph / 60 Hz
-  Led no-spot 3000°K
-  +39.2/+42.8°F

Data Sheet *Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation  *Crate weight only

	Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
	TRT2P8SS1000	39 3/8 x 33 1/8 x 47 1/4  46 7/16 x 40 1/4 x 57 7/8	441  198	1350 / 6.9	0.9	5801 / 14	R452A
	TRT2P8SS1500	59 1/8 x 33 1/8 x 47 1/4  66 1/8 x 40 1/4 x 57 7/8	705  287	1500 / 7.9	1.1	7165 / 14	R452A
	TRT2P8SS2000	78 3/4 x 33 1/8 x 47 1/4  85 13/16 x 40 1/4 x 57 7/8	882  364	1800 / 9.9	1.3	8530 / 14	R452A

Optionals:

- 
SERIG01
Serigraphy
RAL color
- 
BRDTR01-02
Inox profiles
- 
CIVF117
Perimetral top for
drop-in config.
- 
CIT16
Condensation
water pan
- 
CIM08
Kit wheels