




Freezer Merchandiser

molded heat-insulated tank made of ecological polyurethane coated with AISI 304 s/s | fan ventilated refrigeration system on all display levels positioned in the lower tank | automatic defrost | remote hermetic condensing unit | digital control panel | 'premium' doors with mirror serigraphy | bottom tray in polished steel | perimeter walls in double-glazed glass | glass shelves adjustable on rack rods | vertical lighting integrated on the internal corners with no spot 3000°K strip-led | base of counter and tubular steel base



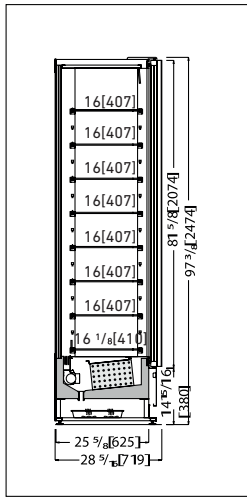



Technical



- Ventilated
- R452A
- Semi-Hermetic
- Led no-spot 3000°K
- Automatic / reverse cycle
- N.4 / RH 55% max 75°F
- 220 V / 3ph / 60Hz+N
- 0°F

Data Sheet *Measurements are subject to revisions/changes, please refer to manufacturer's drawings at order confirmation.

*Crate Weight Only



Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion BTU / °F	GAS Type
BRL1GEL1PE	27 9/16 x 27 1/16 x 97 3/8 34 5/8 x 41 1/4 x 108 13/16	551 287	2200/6,5	1,1	3753 / -31	R452A
BRL1GEL2PE	54 5/8 x 27 1/16 x 97 3/8 61 3/4 x 41 1/4 x 108 13/16	816 507	4500/10,0	1,9	6142 / -31	R452A

**If the merchandiser will be connected to a rack system, the supplied rack system *must* have a hot-gas defrost feature.
**If the merchandiser is connected to a rack system, the electrical phase will be 1-Ph *instead of* 3-Ph.

Optionals:

- DPC01 Customized height
- SERVERT Key lock
- SERVERT01 Electronic lock
- CIT46 Remote assi-
- CIT37 Converter device from 0°F to 39.2°F