



## Refrigerated Meat Dry Aging Cabinet


Molded heat-insulated tank made of ecological polyurethane coated with AISI 304

s/s | ceiling system with ventilated refrigeration with finned evaporator and electronic valve, integrated humidification and bacterial reduction system | auto-matic defrosts | n.03 height adjustable shelves in satin stainless steel | built-in hermetic condensing unit | touch panel with meat dry aging programs that can be recorded and monitored by the operator | s/s sides | 'premium' doors without central upright with RAL 7021 screen printing and additional lighting integrated on the door | bottom tray and back in satin stainless steel | shelves in satin stainless steel adjustable on rack rod | indirect lighting incorporated on the door frame with diffuse led 3000°K | base of counter in s/s | s/s feet adjustable in height



35.6°F



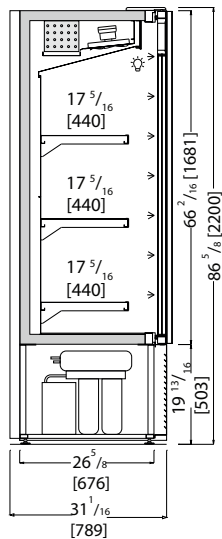

## Technical



	Ventilated		Automatic
	R452A		N. 4 / RH 55% max 75°F
	Hermetic		220 V / 1 Ph / 60 Hz
	Led no-spot 3000°K		35.6°F

## Data Sheet

\*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation




\*Crate weight only




Model	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
EXL74MAT6E	27 <sup>9</sup> / <sub>16</sub> x 31 <sup>1</sup> / <sub>16</sub> x 86 <sup>5</sup> / <sub>8</sub> 34 <sup>5</sup> / <sub>8</sub> x 38 <sup>1</sup> / <sub>8</sub> x 98 <sup>1</sup> / <sub>16</sub>	419 243	1600 / 8,2	1,0	3412 / 14	R452a

\*Requires remote condensing unit.




EXL74MAT12I	51 <sup>3</sup> / <sub>16</sub> x 31 <sup>1</sup> / <sub>16</sub> x 86 <sup>5</sup> / <sub>8</sub> 58 <sup>1</sup> / <sub>4</sub> x 38 <sup>1</sup> / <sub>8</sub> x 98 <sup>1</sup> / <sub>16</sub>	705 397	2500 / 13,5	1,4	4948 / 14	R452a
-------------	---	------------	-------------	-----	-----------	-------




EXL74MAT18I	74 <sup>13</sup> / <sub>16</sub> x 31 <sup>1</sup> / <sub>16</sub> x 86 <sup>5</sup> / <sub>8</sub> 81 <sup>7</sup> / <sub>8</sub> x 38 <sup>1</sup> / <sub>8</sub> x 98 <sup>1</sup> / <sub>16</sub>	904 562	3400 / 17,0	1,8	6483 / 14	R452a
-------------	--	------------	-------------	-----	-----------	-------


## Optionals:



FVMUR01  
Side with glass  
window



VRVCP/F/S  
Heated double  
glazing



SHELFT8  
Tube with hooks  
for charcuterie



SERVTO1  
Electronic lock



MCDL  
Dimmer control  
for LED lighting



CIT46  
Remote assistance